




Mercedes-Benz

Accessories

## Installation Instructions

Mobile telephone bracket  
Sony Ericsson T6 10 and  
Sony Ericsson T630

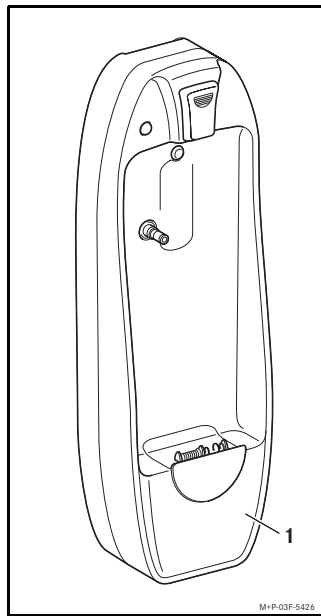

M-P-03F-5426

GB

### Validity

These installation instructions are valid for vehicles with pre-wiring with interface (code 386) or with a Mercedes-Benz mobile phone (code 388) or with a Mercedes-Benz multifunction steering wheel with hands-free system, used in each case with a Sony Ericsson T6 10 or a Sony Ericsson T630 mobile phone.

### Parts included

- (1) Mobile phone cradle

### Notes

Please contact a qualified specialist workshop if you encounter difficulties when installing the mobile phone cradle.

Mercedes-Benz recommends that you use a Mercedes-Benz Service Centre for this purpose.

The manufacturer reserves the right to change technical details from those shown in the illustrations contained in these installation instructions.

These installation instructions also refer to the vehicle Owner's Manual. Please keep it handy for reference.


© 2007, Daimler AG

03/04  
03F005-04

## Contents

- Installing the mobile phone cradle ▷ 2
- Inserting the mobile phone ▷ 3
- Hands-free mode display ▷ 4
- Removing the mobile phone ▷ 5
- Removing the mobile phone cradle ▷ 6
- Instructions for use ▷ 7
- Notes and special features regarding the operation of the mobile phone when inserted ▷ 8
- Only for vehicles with pre-wiring with interface or with a Mercedes-Benz mobile phone ▷ 9


## Installing the mobile phone cradle

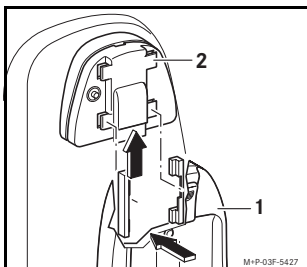

M-P-03F-5427


1. Press the mobile phone cradle (1) into the retainers on the existing mounting bracket (2), hold it in place and slide the cradle (1) upwards until it clicks into place.

## Inserting the mobile phone

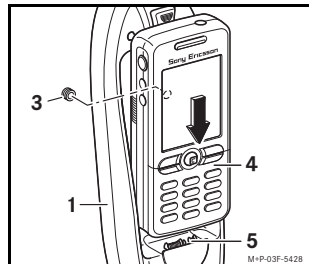

M-P-03F-5428

1. Remove the rounded cover (3) from the back of the mobile phone (4).
2. Slide the lower end of the mobile phone (4) into the connector (5) of the cradle (1).

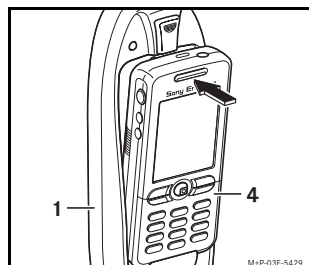


M-P-03F-5429

3. Press the upper end of the mobile phone (4) into the cradle (1) until the mobile phone (4) clicks into place in the cradle (1).


## Hands-free mode display

To ensure that the hands-free system functions correctly after you have inserted the phone into the cradle, you must switch the phone on and activate hands-free mode.

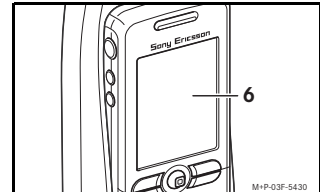


M-P-03F-5430

A message appears on the display (6) of the mobile phone (the exact wording can be found in the operating instructions for the mobile phone). If this is not the case, remove the mobile phone (see the section entitled "Removing the mobile phone") and insert it again.

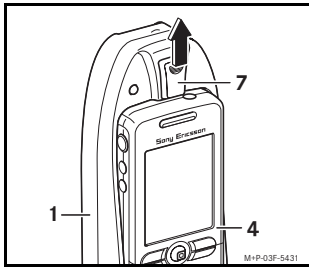

1. Slide the release key (7) upwards and pull the upper end of the mobile phone (4) out of the cradle (1). Then remove the mobile phone (4) upwards out of the cradle (1).
2. Replace the rounded cover (see the section entitled "Inserting the mobile phone") on the back of the mobile phone.

1. Remove the mobile phone from the cradle (see the section entitled "Removing the mobile phone").

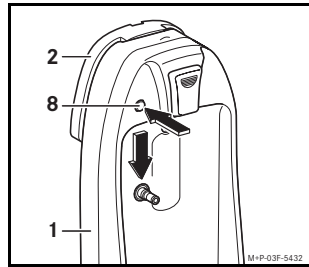

2. Press the release button (8) and keep it depressed. Slide the mobile phone cradle (1) downwards and remove it from the existing mounting bracket (2).

1. Instructions for use of the mobile phone cradle in connection with the factory-installed hands-free system (code 386 / 388) can be found in the Mercedes-Benz Owner's Manual.
2. The following instructions for use (points a, b and c) only apply to retrofitted accessories for the Mercedes-Benz multi-function steering wheel with hands-free system.
  - General instructions for using the hands-free system: Operation of the hands-free system using the buttons on the multi-function steering wheel and how to set the run-on time are both explained in the vehicle Owner's Manual.
  - Displaying the full name or number (this function depends on the vehicle model): To display the full name, press the "+" button. To display the full number, press the "-" button.
  - Setting the volume: During a telephone conversation, you can adjust the volume. To increase the volume, press the "+" button. To decrease the volume, press the "-" button.

**Notes and special features regarding the operation of the mobile phone when inserted**

- When the switched-on mobile phone is inserted into the cradle, the mobile phone automatically adjusts to the "Vehicle profile". The message "Vehicle profile" must appear in the display of the mobile phone. If this message is not displayed, switch the mobile phone off and then back on again.
- The hands-free system of the vehicle can only read out the telephone book of the mobile phone. It cannot access the telephone book of the SIM card. If you wish to use the telephone entries of the SIM card, you must copy these entries into the telephone book of the mobile phone (please refer to the operating instructions for the mobile phone).
- Your mobile phone's polyphonic ringtones can only be rendered as mono ringtones over the vehicle loudspeaker.
- Mercedes-Benz recommends switching off the key tones of the mobile phone (please refer to the operating instructions for the mobile phone). Otherwise, should you wish to listen to messages in your mailbox, for example, and enter the required commands via the key pad on your mobile phone, the key tones will be transmitted very loudly over the vehicle loudspeaker.

**Only for vehicles with pre-wiring with interface (code 386) or with a Mercedes-Benz mobile phone (code 388):**

- On Mercedes-Benz radios with a number pad, the number keys can be used to operate the speed-dial functions (vehicles with pre-wiring with interface (code 386) or Mercedes-Benz mobile phone (code 388)). Keys 1 – 9 can be used to access memory positions 1 – 9 of the telephone book. To call up the required telephone numbers stored at positions 1 – 9, memory positions 1 – 9 in your telephone book must be programmed accordingly (please refer to the operating instructions for the mobile phone).
- The first ten SMS text messages are stored on the SIM card of the mobile telephone. They cannot be read using the vehicle display. Every additional SMS text message is stored in the mobile phone's memory and can be read using the vehicle display.